


Specifications

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 800V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000mΩ min
- Temperature range: -40°C ~ +105°C
- *Suitable JVT2060T series Terminal
JVT2060W series Wafer
- Compliant with RoHS and REACH
Contact JVT for details

Assembly layout

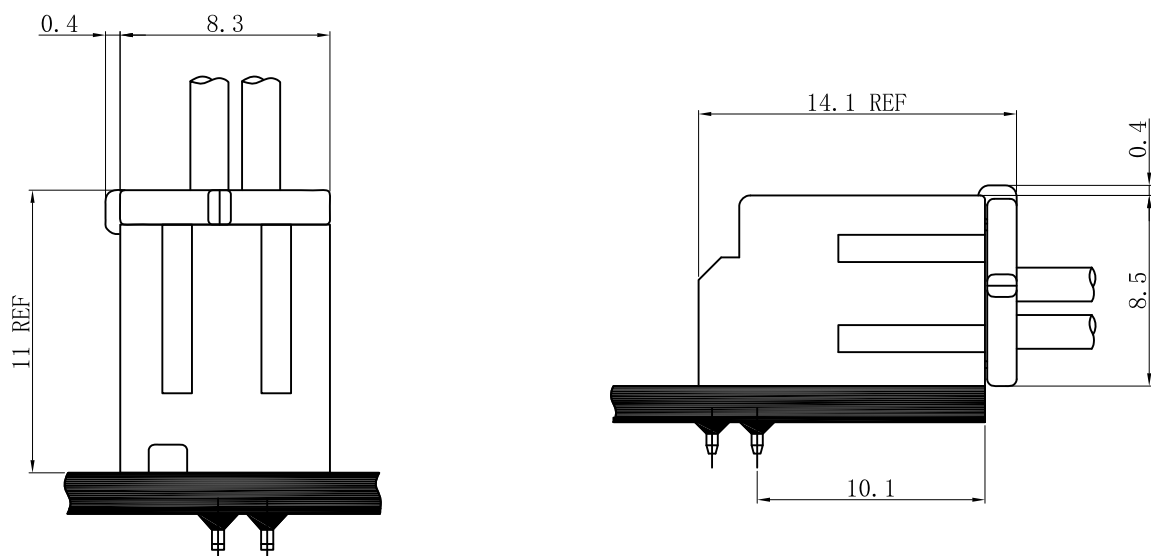

JVT2060H

2.0mm Pitch housing

HOUSING

Part No.: JVT2060HNO-2*XXL






Material: Nylon 66 UL94V-0

Mates With Part(s): JVT2060 Terminal

JVT2060HNO-2*XXL

Logo
Series NO.
Housing






Lock
Pin NO.
PA66 UL94V-0



CKL	A	B	C	CKL	A	B	C
2*02	2.00	6.00	4.65	2*12	22.00	26.00	24.65
2*03	4.00	8.00	6.65	2*13	24.00	28.00	26.65
2*04	6.00	10.00	8.65	2*14	26.00	30.00	28.65
2*05	8.00	12.00	10.65	2*15	28.00	32.00	30.65
2*06	10.00	14.00	12.65	2*16	30.00	34.00	32.65
2*07	12.00	16.00	14.65	2*17	32.00	36.00	34.65
2*08	14.00	18.00	16.65	2*18	34.00	38.00	36.65
2*09	16.00	20.00	18.65	2*19	36.00	40.00	38.65
2*10	18.00	22.00	20.65	2*20	38.00	42.00	40.65
2*11	20.00	24.00	22.65				

JVT2060T

2.0mm Pitch Crimp Terminal

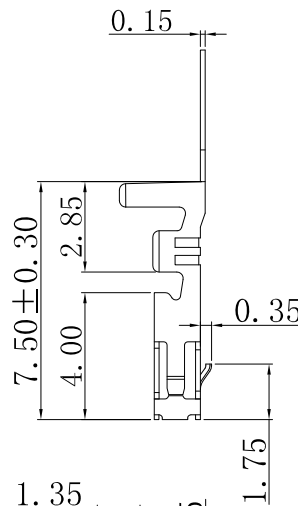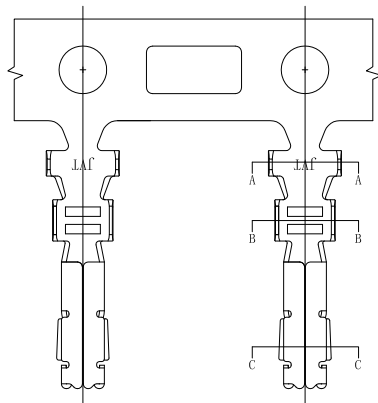

JVT2060TP-SNS



Logo
Series NO.
T-Terminal
P-Phosphor
bronze

S-Stamping
before Plating
Tin Plated

JVT2060TP-SNS	Phos Bronze	Tin Plated	AWG#22~28	1.5mm(Max)	JVT2060 HOUSING
PART NO	Material	Finish(Pin)	Wire Range	Insulation O.D.	Mates With Part(s)

JVT2060W




2.0mm Pitch 180°Wafer-DIP TYPE



JVT2060W46-2*XXSNP-D

Logo
Series NO.
Wafer
46-PA46

D-DIP
P-With boss
SN-Tin Plated
Pin NO.

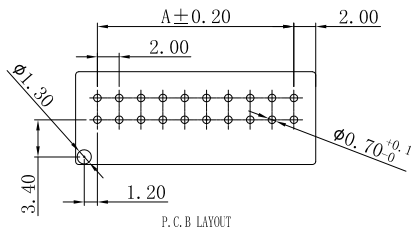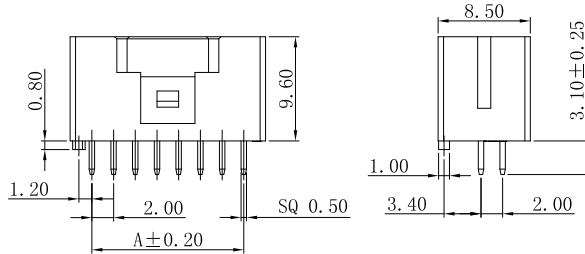



04P~10P Without Guideway
12P~40P With Guideway

CKL	A	B	CKL	A	B
2*02	2.00	6.00	2*12	22.00	26.00
2*03	4.00	8.00	2*13	24.00	28.00
2*04	6.00	10.00	2*14	26.00	30.00
2*05	8.00	12.00	2*15	28.00	32.00
2*06	10.00	14.00	2*16	30.00	34.00
2*07	12.00	16.00	2*17	32.00	36.00
2*08	14.00	18.00	2*18	34.00	38.00
2*09	16.00	20.00	2*19	36.00	40.00
2*10	18.00	22.00	2*20	38.00	42.00
2*11	20.00	24.00			

JVT2060W46-2*XXSNP-D	PA46 UL94V-0	Brass	Tin Plated	JVT2060 Housing
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With Part(s)

JVT2060W






2.0mm Pitch 90°Wafer-DIP TYPE



JVT2060W46-2*XXSNRP-D

Logo
Series NO.
WAFER
46-PA46
Pin NO.

D-DIP
P-With boss
Right Angle 90°
Tin Plated

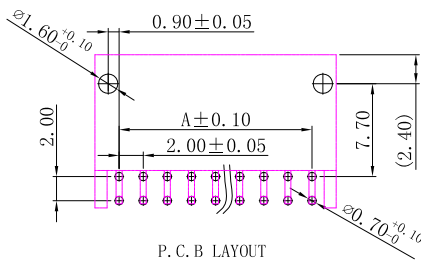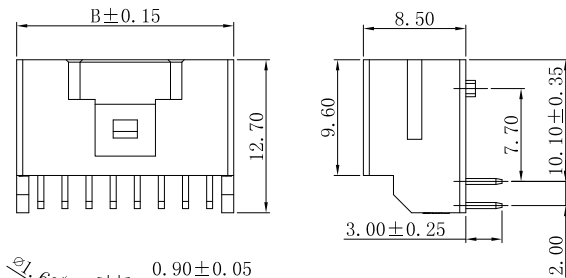

04P~10P Without Guideway
12P~40P With Guideway
Scale:1/0.4

CKL	A	B	CKL	A	B
2*02	2.00	6.00	2*12	22.00	26.00
2*03	4.00	8.00	2*13	24.00	28.00
2*04	6.00	10.00	2*14	26.00	30.00
2*05	8.00	12.00	2*15	28.00	32.00
2*06	10.00	14.00	2*16	30.00	34.00
2*07	12.00	16.00	2*17	32.00	36.00
2*08	14.00	18.00	2*18	34.00	38.00
2*09	16.00	20.00	2*19	36.00	40.00
2*10	18.00	22.00	2*20	38.00	42.00
2*11	20.00	24.00			

JVT2060W46-2*XXSNRP-D	PA46 UL94V-0	Brass	Tin Plated	JVT2060 Housing
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With Part(s)