
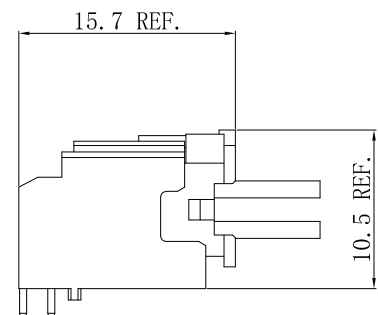


Specifications

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 800V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000mΩ min
- Temperature range: -40°C ~ +105°C
- *Suitable JVT2038T series Terminal
JVT2038W series Wafer
- Compliant with RoHS and REACH
Contact JVT for details

Assembly layout

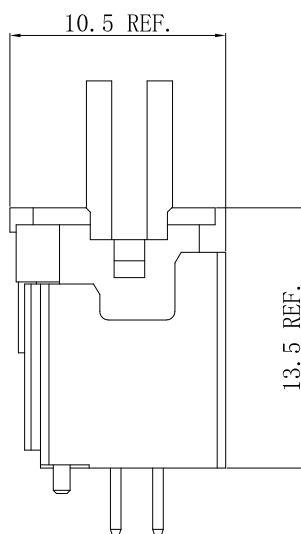

JVT2038H

2.0mm Pitch housing






HOUSING

Part No.: JVT2038HN0-XXL-A




Material: PA66 UL94V-0

Mates With Part(s): JVT2038Terminal

(10~14P)

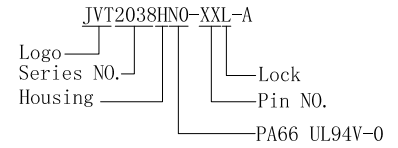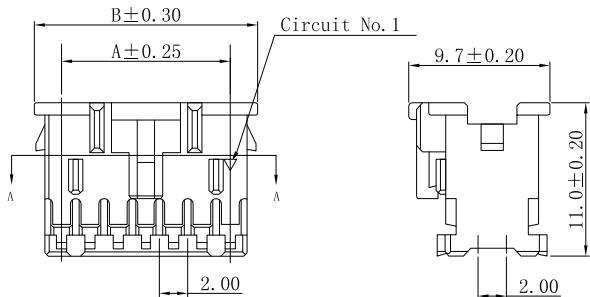





(16~32P)

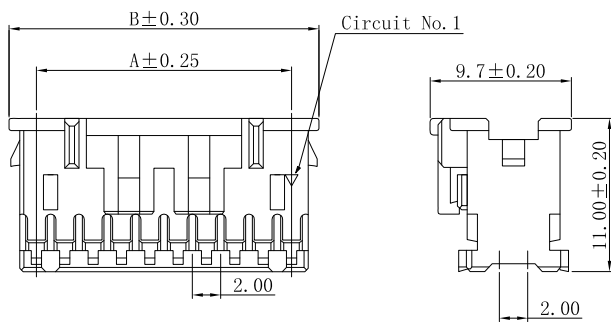


Poles	DIM		Poles	DIM	
	A	B		A	B
04	2.00	5.0	20	18.00	22.0
06	4.00	7.0	22	20.00	24.0
08	6.00	9.0	24	22.00	26.0
10	8.00	12.0	26	24.00	28.0
12	10.00	14.0	28	26.00	30.0
14	12.00	16.0	30	28.00	32.0
16	14.00	18.0	32	30.00	34.0
18	16.00	20.0			

JVT2038T


2.0mm Pitch Crimp Terminal

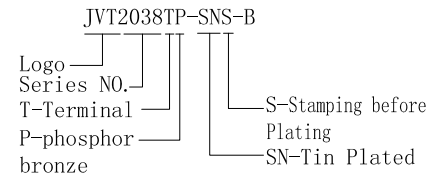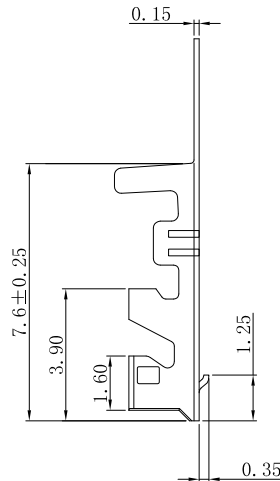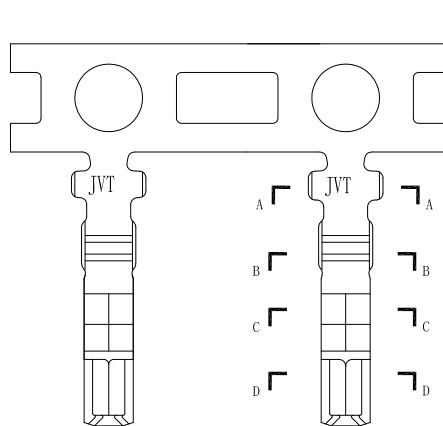


SECTION A-A



SECTION B-B



SECTION C-C








SECTION D-D

JVT2038TP-SNS	Phos Bronze	Tin Plated	AWG#22~28	1.5mm(Max)	JVT2038 HOUSING
PART NO	Material	Finish(Pin)	Wire Range	Insulation O.D.	Mates With Part(s)


JVT2038W

2.0mm Pitch 180°Wafer-DIP TYPE



JVT2038WPT-XXSNWH-D
Logo
Series NO.
Wafer
PT-PBT
Pin NO.
DIP
White
SN-Tin Plated







POLES	Dimensions (mm)			POLES	Dimensions (mm)		
	A	B	C		A	B	C
04	2.0	6.0	5.20	24	22.0	26.0	24.5
06	4.0	8.0	7.20	26	24.0	28.0	26.5
08	6.0	10.0	9.20	28	26.0	30.0	28.5
10	8.0	12.0	10.5	30	28.0	32.0	30.5
12	10.0	14.0	12.5	32	30.0	34.0	32.5
14	12.0	16.0	14.5	34	32.0	36.0	34.5
16	14.0	18.0	16.5	36	34.0	38.0	36.5
18	16.0	20.0	18.5	38	36.0	40.0	38.5
20	18.0	22.0	20.5	40	38.0	42.0	40.5
22	20.0	24.0	22.5				

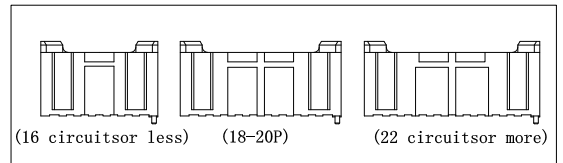

JVT2038WPT-XXSNWH-D	PBT UL94V-0	Brass	Tin Plated	JVT2038 Housing
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With Part(s)

JVT2038W

2.0mm Pitch 90°Wafer-DIP TYPE

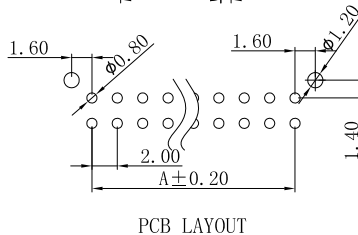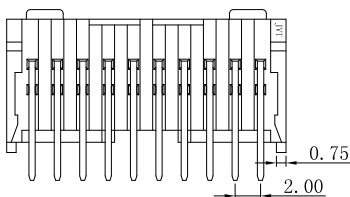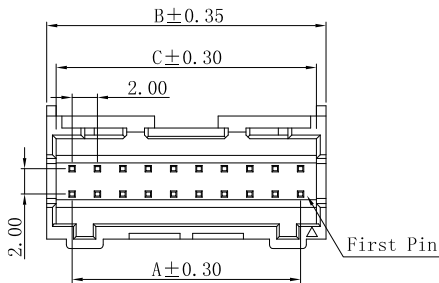

JVT2038WXX-XXSNWHR-D
Logo
Series NO.
Wafer
PT-PBT
NO-PA66
Pin NO.
DIP
R-Right Angle 90°
White
SN-Tin Plated

POLES	Dimensions (mm)			POLES	Dimensions (mm)		
	A	B	C		A	B	C
04	2.0	6.0	5.20	24	22.0	26.0	24.5
06	4.0	8.0	7.20	26	24.0	28.0	26.5
08	6.0	10.0	9.20	28	26.0	30.0	28.5
10	8.0	12.0	10.5	30	28.0	32.0	30.5
12	10.0	14.0	12.5	32	30.0	34.0	32.5
14	12.0	16.0	14.5	34	32.0	36.0	34.5
16	14.0	18.0	16.5	36	34.0	38.0	36.5
18	16.0	20.0	18.5	38	36.0	40.0	38.5
20	18.0	22.0	20.5	40	38.0	42.0	40.5
22	20.0	24.0	22.5				

JVT2038WPT-XXSNWHR-D	PBT UL94V-0	Brass	Tin Plated	JVT2038 Housing
JVT2038WN0-XXSNWHR-D	PA66 UL94V-0			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With Part(s)