
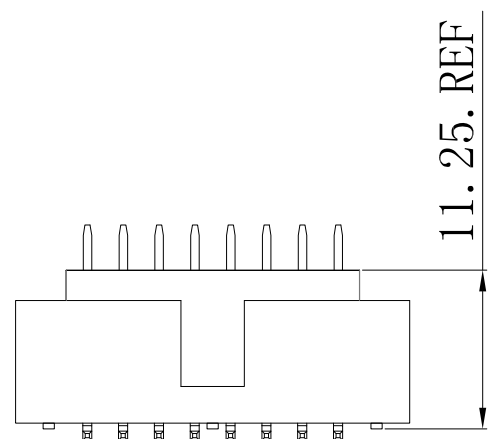


Specifications


- Voltage rating: 250V AC, DC
 - Current Rating: 3A, AC, DC
 - Withstand voltage: 500V AC/minute
 - Contact resistance: 20mΩ max
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40°C ~ +105°C
 - Compliant with RoHS and REACH
- Contact JVT for details

Assembly layout


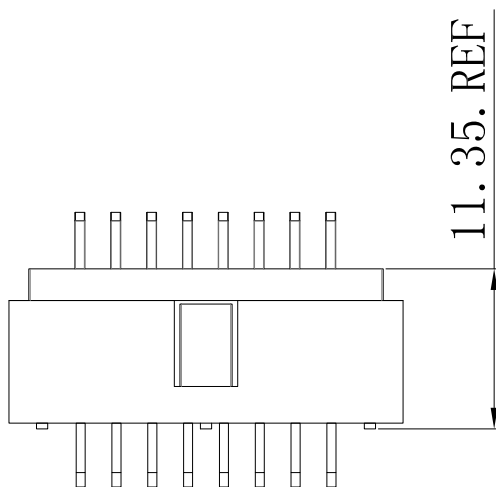


JVT1200W


2.54mm Pitch Wafer-DIP TYPE

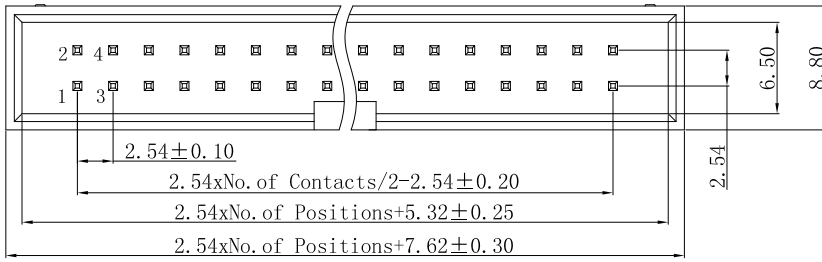

JVT1200H886T-2*XXXX-D330
Logo
Series No.
HSG height
H=8.8
Down 3.15mm
Gold/Tin-Plated
PIN No.
6T-PA6T

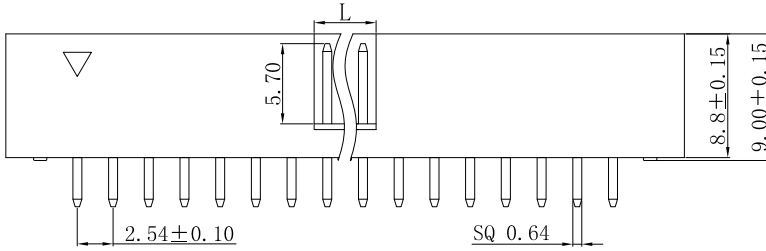

Recommended P. C. B Layout (Top Side)
P. C. B BOARD Tolerance = ±0.05

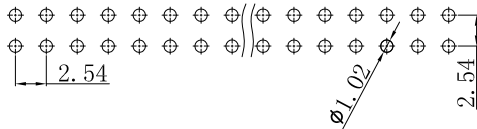


JVT1200H886T-2*XXXX-D330	PBT UL94V-0	Brass	Tin Plated/Gold Plated
PART NO	Material	Material(Pin)	Finish(Pin)



NO. Pin	L
6P-8P	4.00
10P-64P	4.40

JVT1200W


2.54mm Pitch 180°Wafer-SMT TYPE

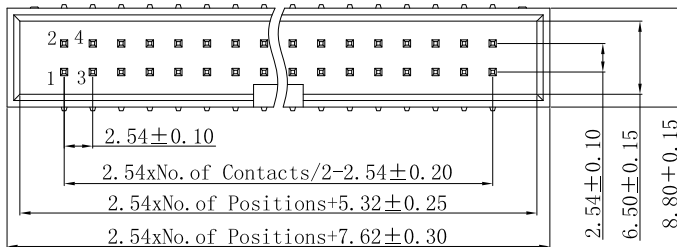

JVT1200H886T-2*XXXX-S
Logo
Series NO.
Shell height
H=8.8
S-SMT
Gold/Tin-Plated
Pin No.
6T-PA6T

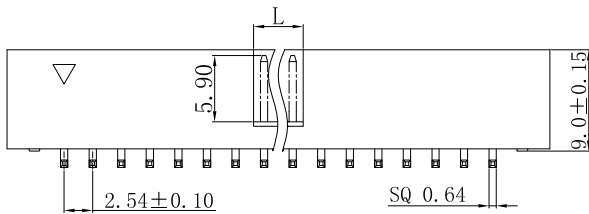

Recommended P. C. B Layout (Top Side)
P. C. B BOARD Tolerance = ±0.05

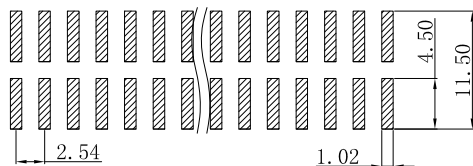


JVT1200H886T-2*XXXX-S	PA6T UL94V-0	Brass	Tin Plated/Gold Plated
PART NO	Material	Material(Pin)	Finish(Pin)




NO. Pin	L
6P-8P	4.00
10P-64P	4.40

JVT1200W

2.54mm Pitch 90° Wafer-DIP TYPE

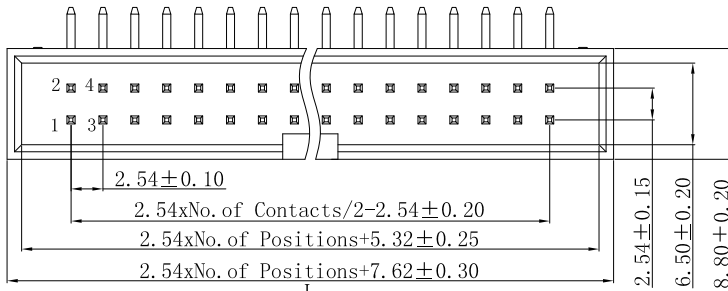

JVT1200H88R6T-2*XXXX-D315
Logo
Series NO.
Shell height
H=8.8
R=90°
Down 3.15mm
Gold/Tin-Plated
PIN No.
6T-PA6T

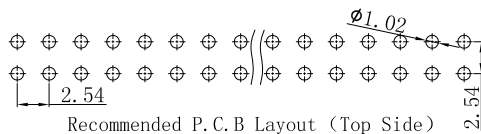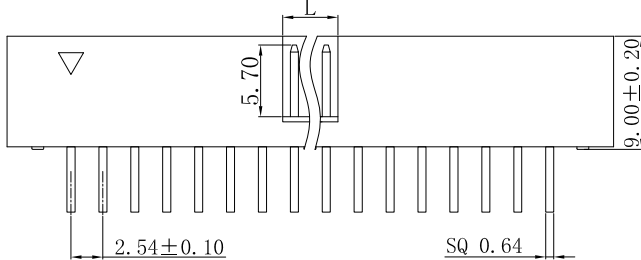

Recommended P.C.B Layout (Top Side)
P.C.B BOARD Tolerance=±0.05)

JVT1200H88R6T-2*XXXX-D315	Brass	Tin Plated/Gold Plated
PART NO	Material	Finish(Pin)

NO. Pin	L
6P-8P	4.00
10P-64P	4.40

