

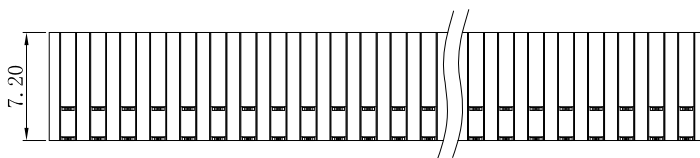



Specifications

- Current Rating: 2A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 20m Ω max
- Insulation resistance: 1000m Ω min
- Temperature range: -40°C ~ +105°C
- Compliant with RoHS and REACH
- Contact JVT for details

JVT2051H





2.0mm 90°Wafer-DIP TYPE

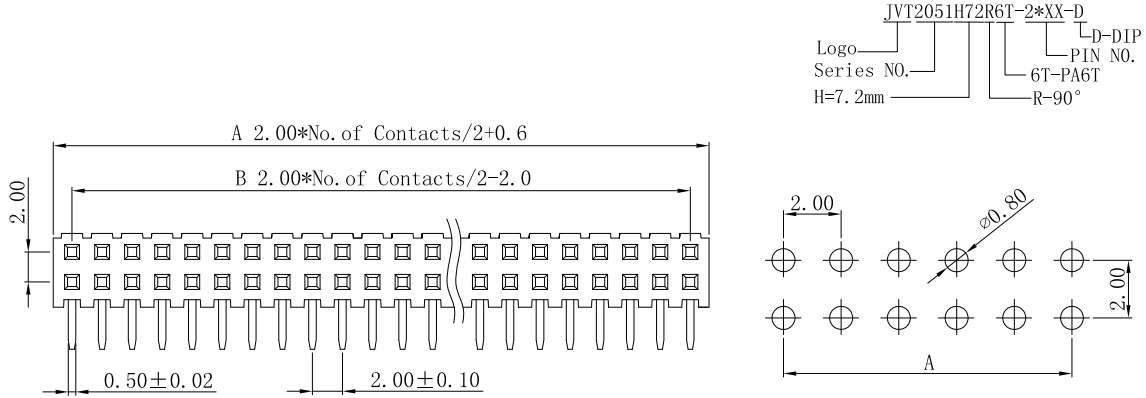

JVT2051H72R6T-2*XX-D	PA6T UL94V-0	Phosphor bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish (Pin)	Mates With Part(s)

JVT2051H





2.0mm Pitch Wafer-DIP TYPE

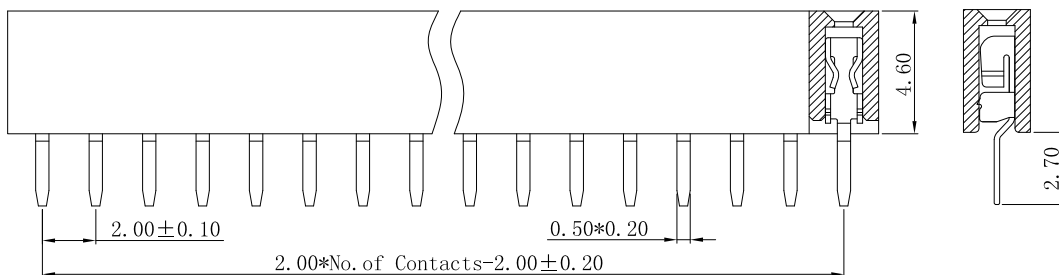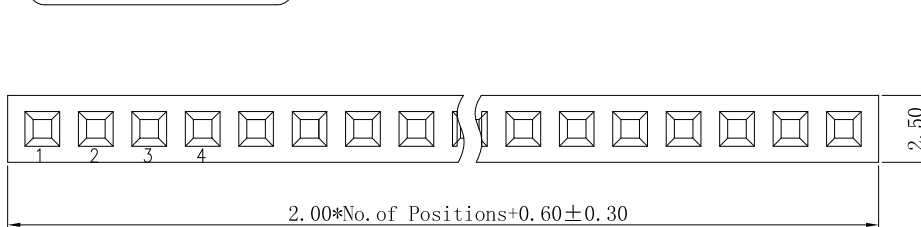

JVT2051H466T-XX	PA6T UL94V-0	Phosphor bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish (Pin)	Mates With Part(s)

JVT2051H





2.0mm Pitch Wafer-SMT TYPE

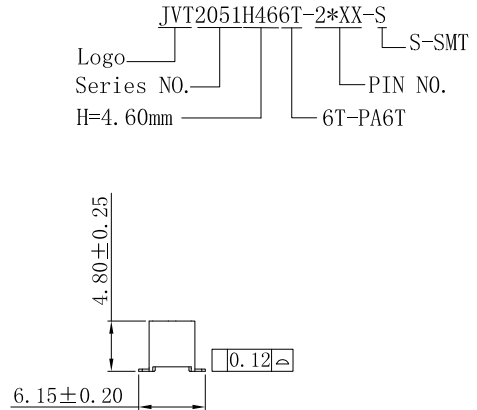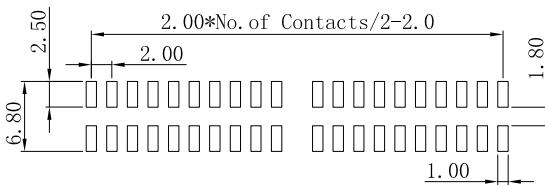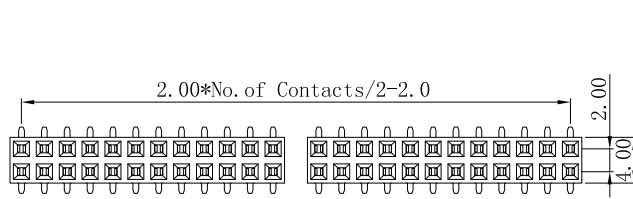

JVT2051H466T-2*XX-S	PA6T UL94V-0	Phosphor bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2051H






2.0mm Pitch Wafer-SMT TYPE

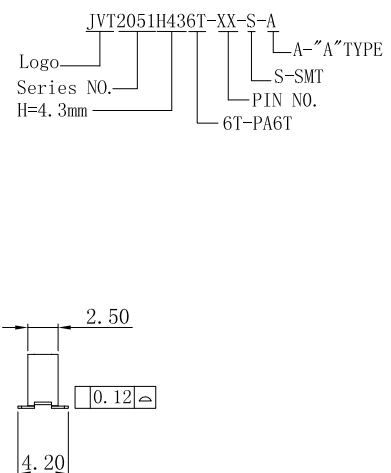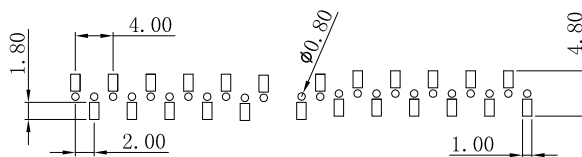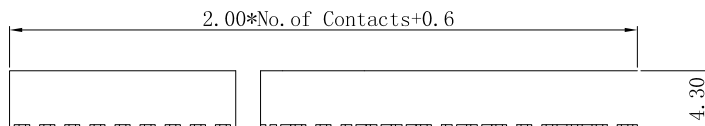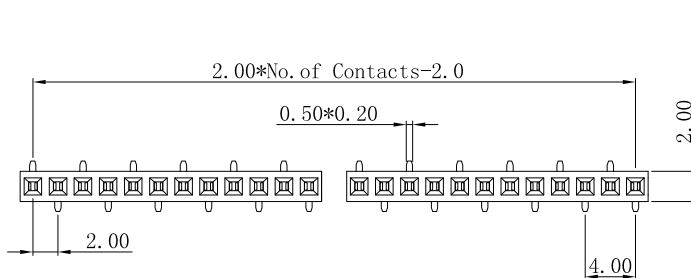

JVT2051H436T-XX-S-A	PA6T UL94V-0	Phosphor Bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2051H






2.0mm Pitch Wafer-DIP TYPE

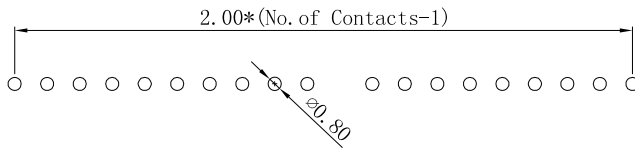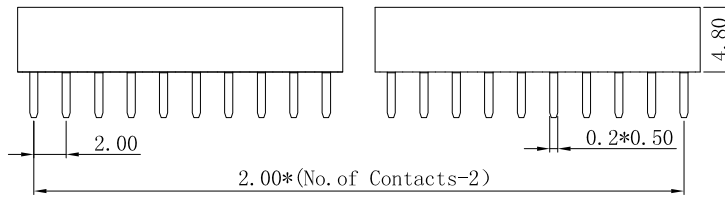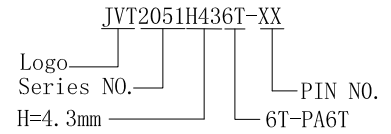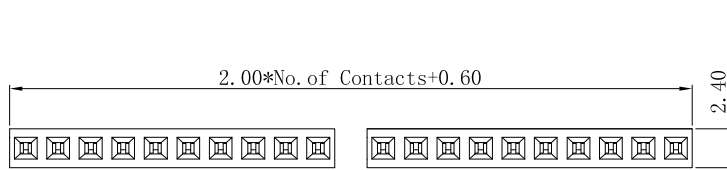

JVT2051H436T-XX	PA6T UL94V-0	Phosphor Bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2051H

2.0mm Pitch Wafer-SMT TYPE

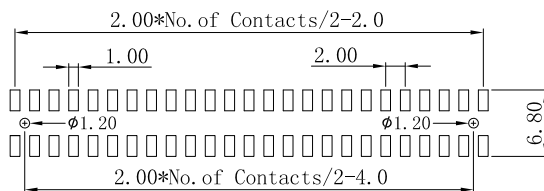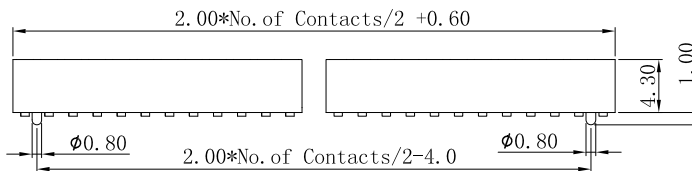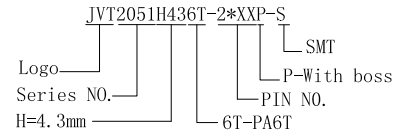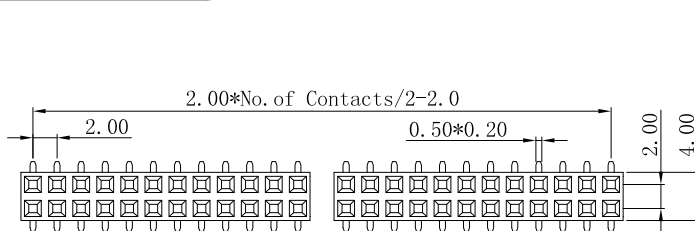


JVT2051H436T-2*XXP-S	PA6T UL94V-0	Phosphor Bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2051W

2.0mm Pitch Wafer-DIP TYPE

JVT2051H43R6T-XX
Logo Series NO. H=4.3mm PIN NO. 6T-PA6T R-Right Angle 90°

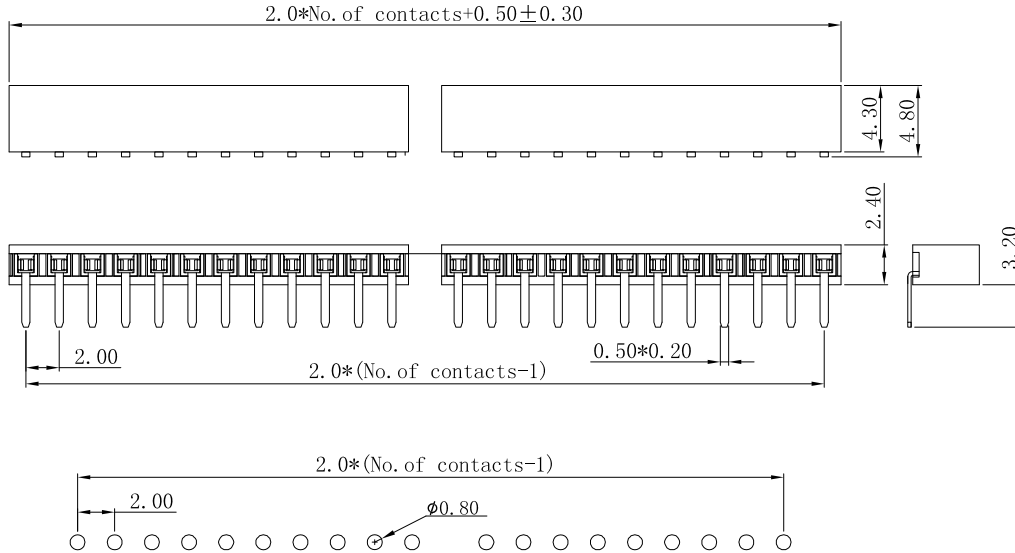


JVT2051H43R6T-XX	PA6T UL94V-0	Phosphor Bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish (Pin)	Mates With Part(s)

JVT2051H

2.0mm Pitch Wafer-SMT TYPE






JVT2051H436T-XX-S-B
Logo Series NO. H=4.3mm B-"B" TYPE S-SMT PIN NO. 6T-PA6T

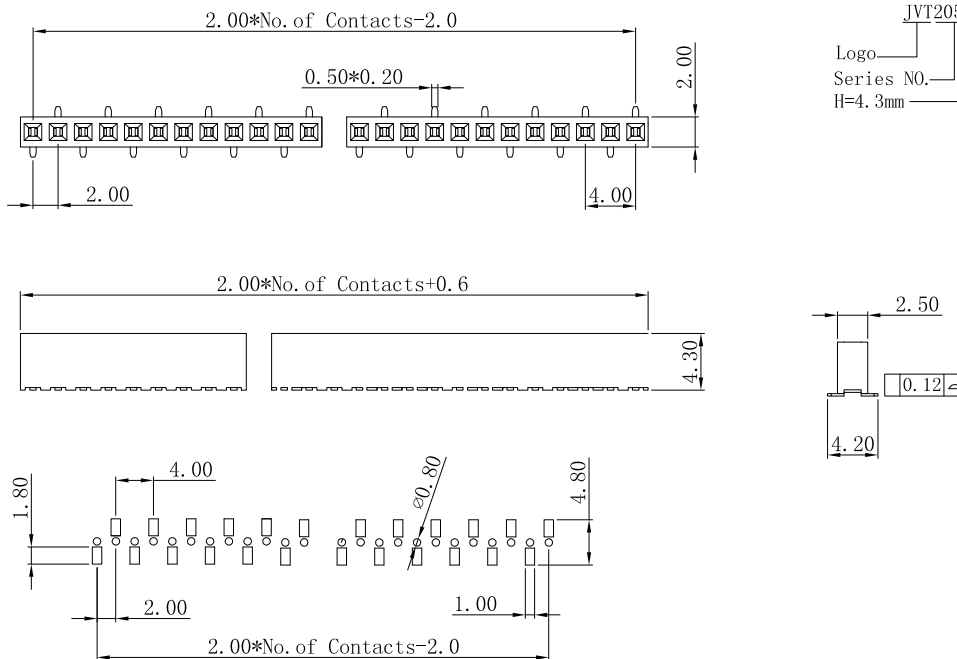

JVT2051H436T-XX-S-B	PA6T UL94V-0	Phosphor Bronze	Gold-plated	JVT2052H
PART NO	Material	Material	Finish (Pin)	Mates With Part(s)

JVT2052H






2.0mm Pitch Wafer-DIP TYPE

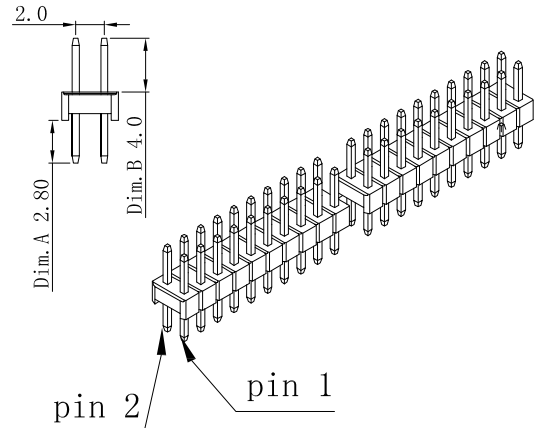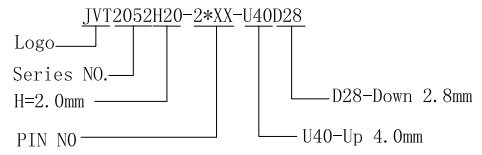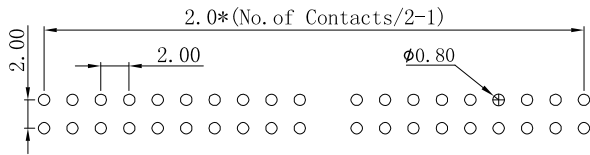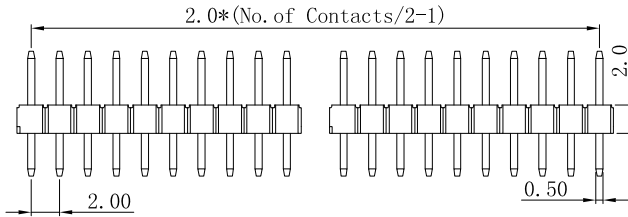

JVT2052H20-2*XX-U40D28	PBT UL94V-0	Brass	Gold-plated	JVT2051H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)


JVT2052H

2.0mm Pitch Wafer-SMT TYPE

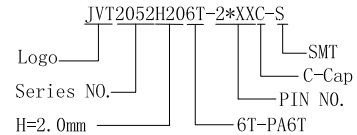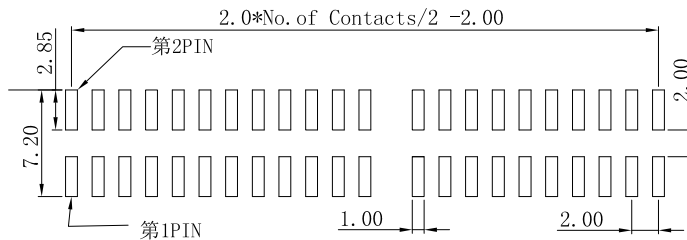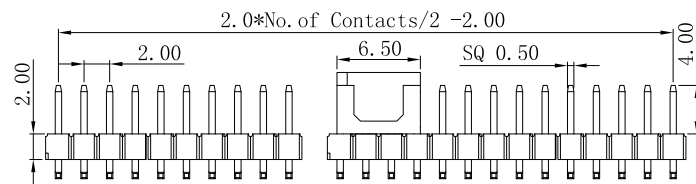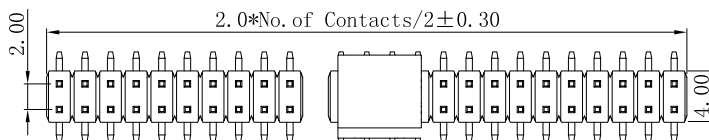


JVT2052H206T-2*XXC-S	PA6T UL94V-0	Brass	Gold-plated	JVT2051H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2052H — 2.0mm Pitch Wafer-DIP TYPE

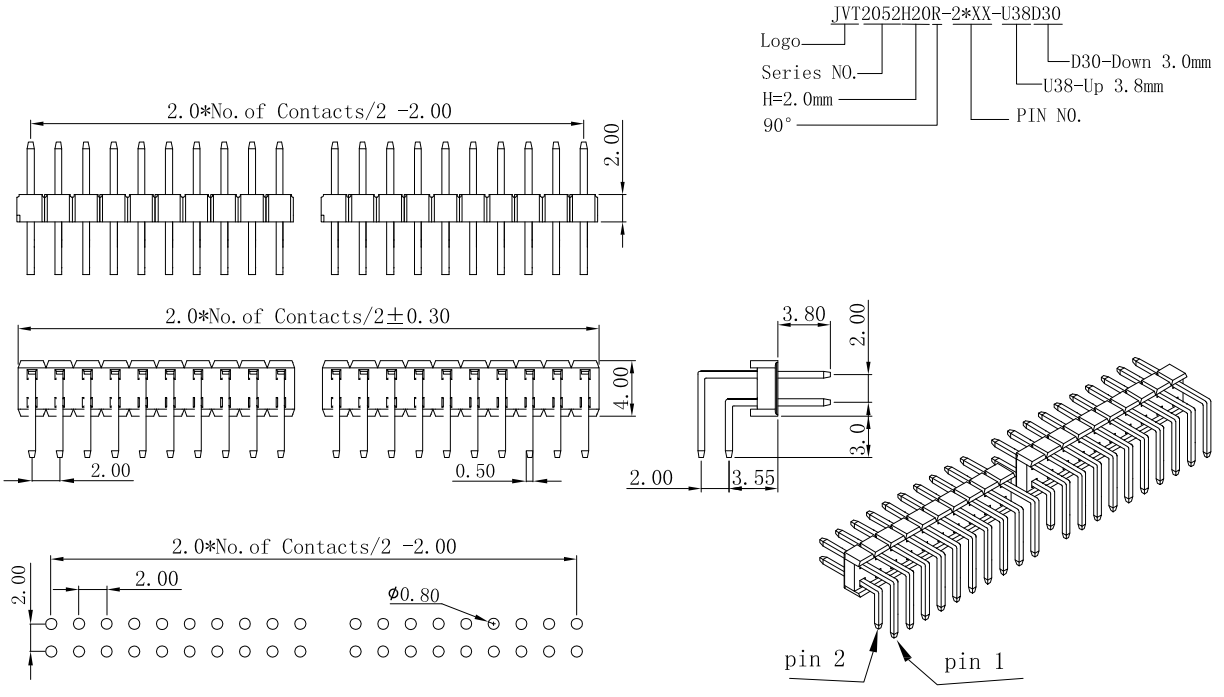

JVT2052H20R-2*XX-U38D30	PBT UL94V-0	Brass	Gold-plated	JVT2051H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)

JVT2052H — 2.0mm Pitch Wafer-SMT TYPE

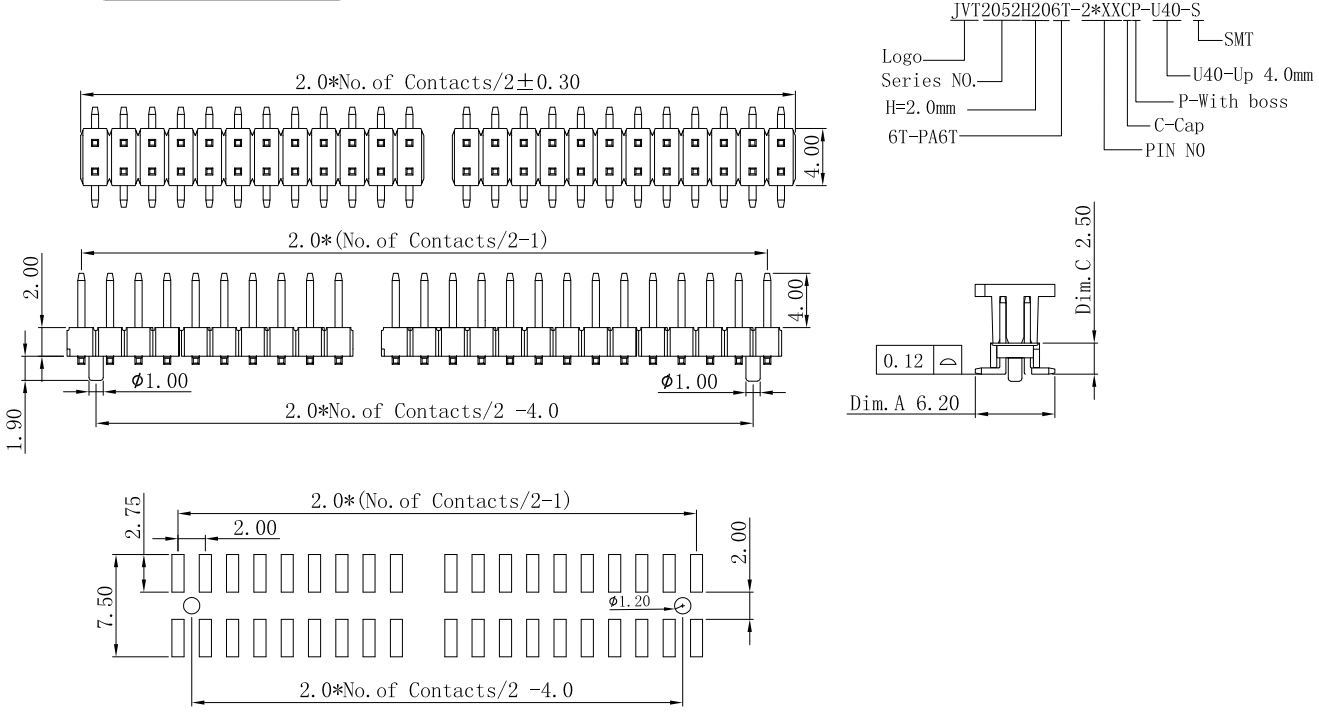

JVT2052H206T-2*XXCP-U40-S	PA6T UL94V-0	Brass	Gold-plated	JVT2051H
PART NO	Material	Material	Finish(Pin)	Mates With Part(s)