


Specifications

- Voltage rating: 100V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000mΩ min
- Temperature range: -40°C ~ +105°C
- Compliant with RoHS and REACH
- Contact JVT for details

Assembly layout

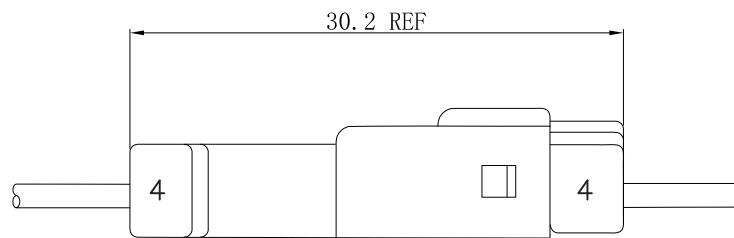

JVT2070H

2.0mm Pitch housing



HOUSING

Part No. : JVT2070HNO-XXM



Material: Nylon 66 UL94V-0

Mates With Part(s): JVT2070 Terminal



JVT2070HNO-XXM
Logo
Series NO.
Housing
NO-PA66
M-Male HSG
Pin NO.





02P





03P



04P





2*03P




2*04P

JVT2070T


2.0mm Pitch Crimp Terminal

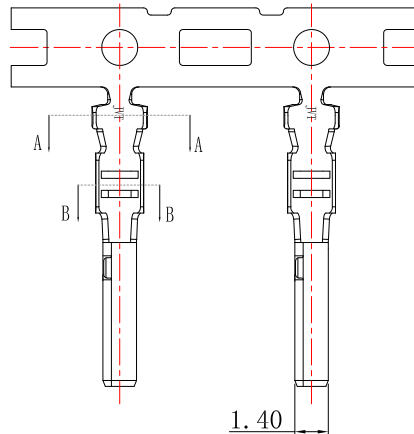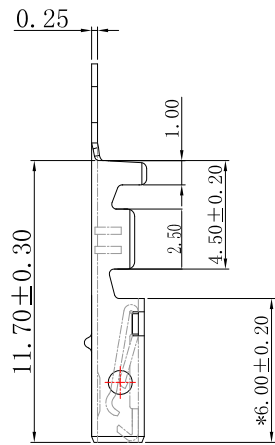


JVT2070TP-SNS
Logo
Series NO.
T-Terminal
P-Phosphor
bronze
S-Stamping
before Plating
SN-Tin Plated



SECTION:A-A



SECTION:B-B



JVT2070TP-SNSW	Phos Bronze	Tin Plated	AWG#22~26	1.7mm(Max)	JVT2070 HOUSING
PART NO	Material	Finish(Pin)	Wire Range	Insulation O.D.	Mates With Part(s)

JVT2071H

2.0mm Pitch housing




HOUSING

Part No. : JVT2071HN0-XXW

Material: Nylon 66 UL94V-0

Mates With Part(s): JVT2071 Terminal

JVT2071HN0-XXW
Logo
Series NO.
Housing
NO-PA66
W-Female HSG
Pin NO.

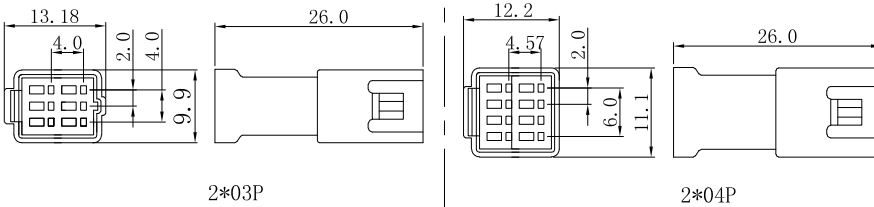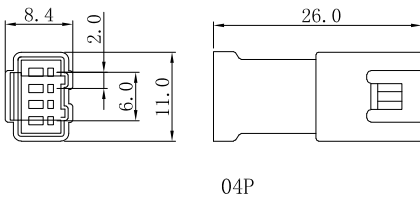
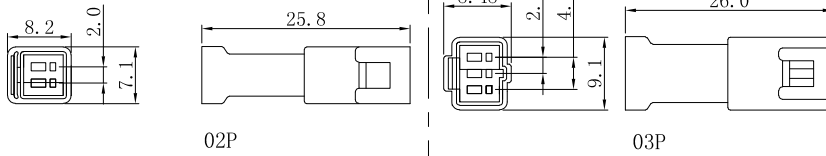


JVT2071T

2.0mm Pitch Crimp Terminal

JVT2071TP-SNS

Logo
Series NO.
T-Terminal
P-Phosphor
bronze
S-Stamping before
Plating
SN-Tin Plated

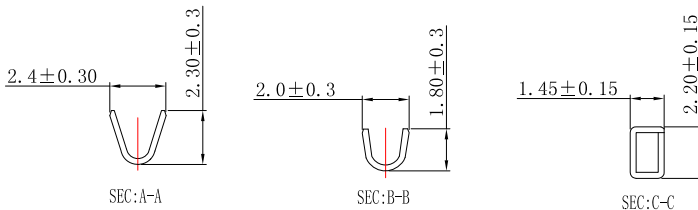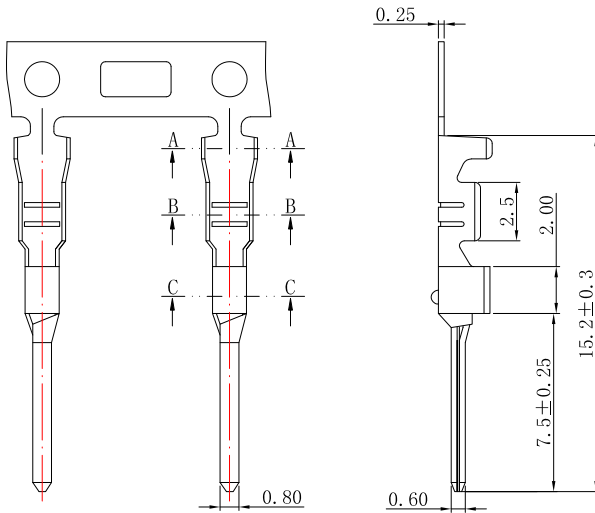

JVT2071TP-SNS-M	Phos Bronze	Tin Plated	AWG#22~26	1.7mm (Max)	JVT2071 HOUSING
PART NO	Material	Finish (Pin)	Wire Range	Insulation O.D.	Mates With Part(s)